


www.growland.net / www.growland-hydroponics.com
https://www.growland.fr / https://www.growland.co.uk
https://www.growland.es / https://www.growland.at
https://www.growland.nl / https://www.growland.it
https://www.growland.se / https://www.growland.pl

AQUAvalve[™]

Simple care guidelines

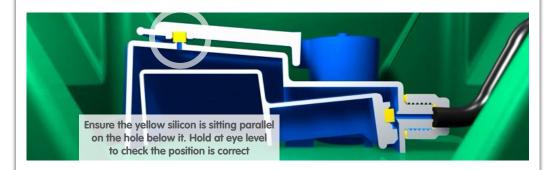

Ensuring that the AQUAvalve floods and drains correctly

- Making sure your AQUAvalve floods and drains correctly is simply achieved and only takes a few seconds.
- 2 Hold the AQUAvalve at eye level so that you can see the yellow silicon fitted to the top float resting on the hole below it.
- The yellow silicon must create a tight seal when touching the hole.
- If it looks like it is not sitting parallel on the hole below, simply lift the top float and apply pressure to one side of the yellow silicon, drop the float and hold at eye level again. Repeat the procedure if necessary.

Care and maintenance

At the end of your growing season, clean the AQUAvalve using warm soapy water. Using an old tooth brush will help.

The AQUAvalve is easily disassembled. The top float will slide all the way across and the bottom float is unclipped from its pivoting position. The circular discs fitted to the top float can also be removed by using pliers to grip the raised point.

At this point is it advisable to remove the yellow silicones to avoid them being lost.

It is also handy to have a paper clip or pipe cleaner to hand so that you can push it through the AQUAvalve nozzle, this will remove any lime scale build up that may have occurred during the growing season.

Blowing through the AQUAvalve nozzle will also help to remove any build up. Do not under any circumstances use a drill & drill bit to clear the AQUAvalve nozzle

This will potentially damage the AQUAvalve beyond repair.

Your 12Pot system set-up guidelines





12Pot system contents


- 1x 225 ltr FlexiTank or rigid green 225 ltr tank
- 1x 16mm click-fit tank adaptor & filter
- 1x 8 metres of 16mm pipe
- 2x 16mm in-line tap
- 1x 16mm tee connector
- 4x 16mm-6mm cross connector

4x 16-6mm tee connector

- 12x 1Pot trays & lids12x 15ltr pot
- 12x AQUAvalve
- 1x 6 metres of 6mm pipe
- 12x marix disc
- 12x root control disc

Plan views and options

Suggested layout

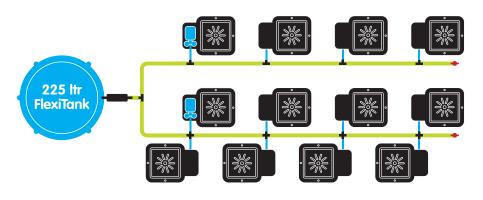

6mm pipe
16mm pipe
16 - 6mm cross connector

16-6mm tee connector

16mm in-line tap


16mm click-fit tank adaptor & filter

AQUAvalve

Advice

- Pot up your plants, water through, then allow your plants to establish in the pots for a period of 7 to 10 days before turning your system on. This will encourage a stronger and healthier root system.
- Always raise your tank to a minimum of 150mm above the highest AQUAvalve and re-fill the tank when there is approximately a 1/3 of the solution left - NEVER ALLOW THE TANK TO RUN EMPTY.
- For best results, we recommend mineral fertilisers. Do not use organic fertilisers, as they have a tendency to block small pipe work.
- Clean all substrate from the bottom and sides of the pots before placing in each tray.
 This will ensure your system is clean from the start.
- Always use free draining substrates, for example: soil/perlite, coco/perlite, soil/clay pebbles, coco/clay pebbles, rockwool/clay pebbles.

1Pot module dimensions





1Pot module setup instructions



Put black marix disc in pot



Fill pot with medium and pot up plants.

Water through pot and allow to drain outside the tray.



Remove collar

Push 6mm pipe through
collar and attach to
AQUAvalve nozzle

Rescrew collar - **DON'T**

Rescrew collar - **DON'T overturn...** when you feel it grip **STOP**



Connect AQUAvalve so 'half moon' is on T section in the tray



Position tray so it is level

Insert root control disc **Gold face up**



Cut 6mm/16mm pipe to appropriate length



According to the size of your system connect your 6mm/16mm pipe to relevant fitting or tank...



Place pot in the tray, make sure it is **CLEAN!**

Place lid over valve onto tray

Using your front instruction sheet, repeat the module set up instructions for the number of trays.

Allow your plants to establish for 7-10 days before turning system on

